


| REVISIONS | | | | APPROVALS | |
|--------------|----|------|----------|------------------------|---------|
| DESCRIPTIONS | BY | DATE | APPROVED | COUNCIL RESOLUTION NO. | 3/10/92 |
| | | | | | |
| | | | | | |

P₁ = CENTER FOR CURB & R/W ARCS
P₂ = CENTER FOR \mathcal{C} ARC

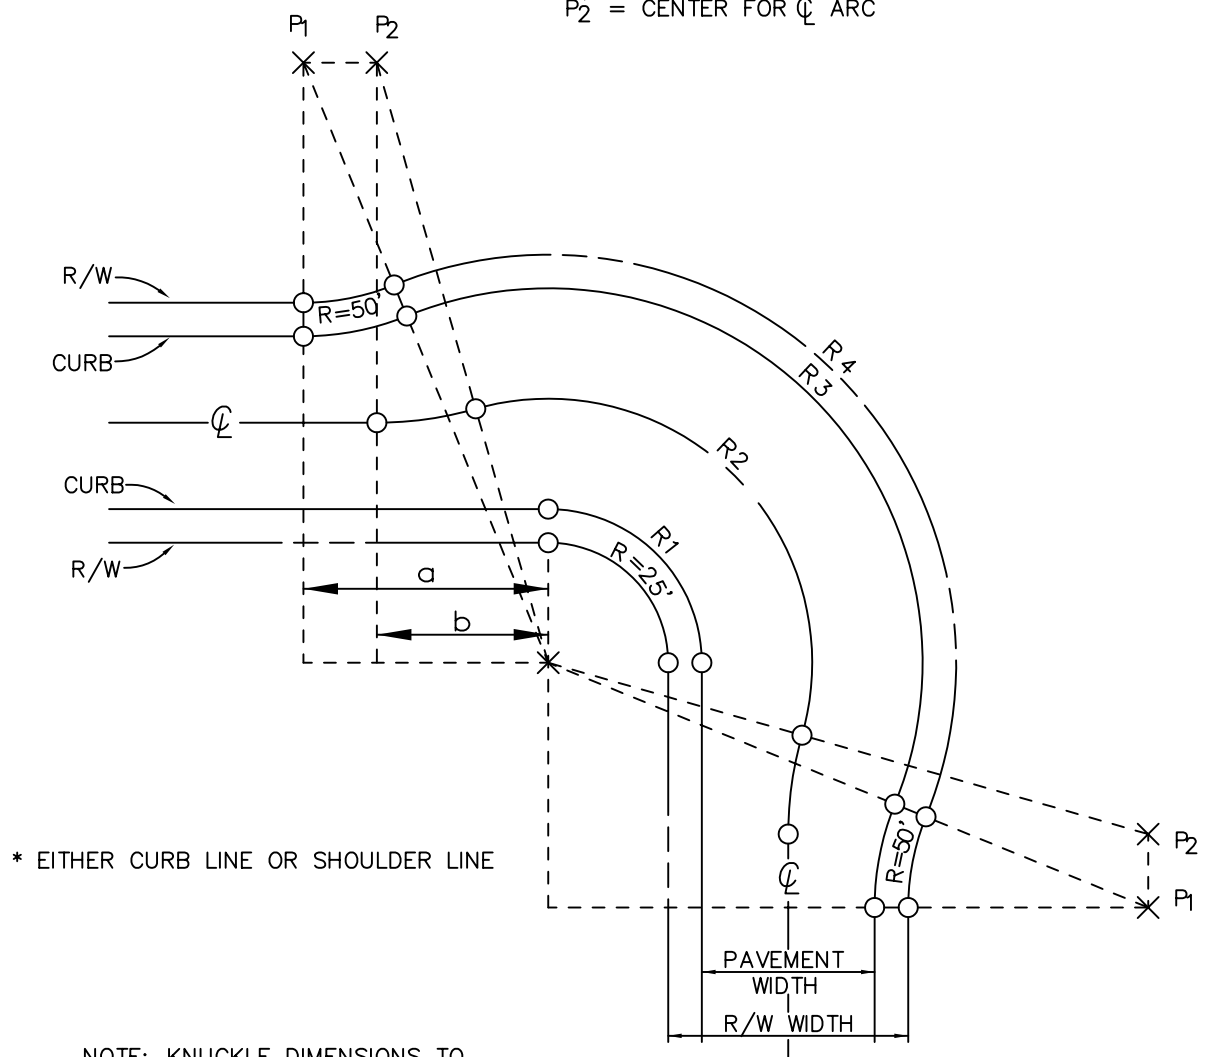

* EITHER CURB LINE OR SHOULDER LINE

NOTE: KNUCKLE DIMENSIONS TO VARY PROPORTIONALLY WITH OTHER R/W AND PAVEMENT WIDTHS.

| R/W WIDTH | PAVEMENT WIDTH | R ₁ CURB | R ₂ \mathcal{C} | R ₃ CURB | R ₄ R/W | a | b | P ₁ TO P ₂ |
|-----------|----------------|---------------------|------------------------------|---------------------|--------------------|--------|--------|----------------------------------|
| 60' | 40' | 35' | 60' | 85' | 95' | 52.92' | 37.08' | 15.83' |

| | | |
|--|---|------------------------|
| DRAWN BY: R.A.L. DESIGNED BY: S.J.S. DATE: 2/27/92 FILE NAME: AT416.DWG | CITY OF ATASCADERO ENGINEERING DEPARTMENT TYPICAL KNUCKLE | DRAWING NO. 416 |
|--|---|------------------------|